



Features & Benefits

- Extra compact design provides a neat, compact and attractive installation
- Converts data outlets into telecommunication ports
- Individually QA tested
- White finish
- Available custom wired in various colours and lengths


Mechanical Specification

Width	16.5mm
Length	39.5mm
Height	22.5mm
Finish	White matt
Socket	Standard UK telephone
Plug	RJ45

Voice Converter

	Surge Arrestor	Capacitor	Resistor
Full Master	3	3	3
PABX	7	3	7
Secondary	7	7	7

Wiring Specification

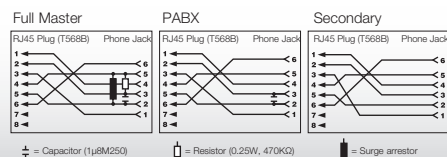

Ordering Information

Product Description	Part Number
Connectix Full Master Voice Converter 150mm	007-006-001-15X
Connectix PABX Voice Converter 150mm	007-006-002-15X
Connectix Secondary Voice Converter 150mm	007-006-003-15X
Connectix RJ45 - RJ11 Voice Converter 150mm	007-006-001-07
Connectix ISDN - RJ45 Leaded Adaptor	00A-004-001-01

Connectix Voice Converters utilise a standard UK telephone socket and RJ45 plug to enable telecomms equipment to be connected to structured cabling systems.

Available in Full Master, PABX and Secondary variants, the adaptors have a unique compact design, making them neat and attractive when installed.

The voice converters provide the end user with the flexibility to run various telecommunication applications including telephones and modems through an RJ45 modular outlet.

Using a voice converter eliminates the problems associated with installing separate telephone and data systems on the same premises. By flood wiring the network, installers can alternate between data and telecomms within the structured cabling system. They are supplied leaded in lengths of 50mm and 150mm, or in special lengths to order.

